

Technical datasheet

SIGNAL



EN 60598-1, 60598-2-22

230V 50/60Hz


IP 20 IK 04




Reference	Finish	Communication	Wireless version	Duration	Maximum viewing distance
SG-K	White		No	1	24

Signalling. SIGNAL. SG-K Made by Normalux. Lumens 100 lm. Duration 1 h. Type of operation Maintained. Type of installation Surface Mounting. Source of light Led. Battery Ni-Cd 3,6V/750mAh. IP 20. IK 04. Version Standard. Finish White. Cover Transparent. Housing made of Polycarbonate. Power 230V 50/60Hz. Dimensions 357 x 225 x 34. Manufactured as per regulation EN 60598-1, 60598-2-22.

Isolux Curve

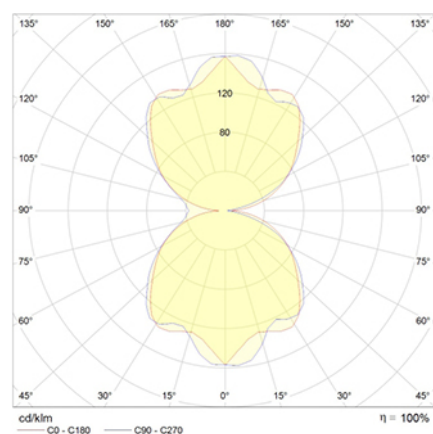

Measurements

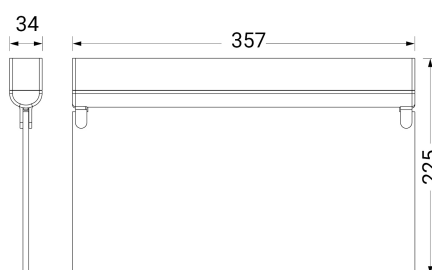

INFORMACIÓN SOBRE PICTOGRAMAS PICTOGRAM INFO



SG-NR | Pictograma reversible izquierda/derecha
SG-NR | Reversible pictogram left/right



SG-ND | Pictograma dirección cambio nivel (inferior)
SG-ND | Pictogram down (change of level)



SG-SU | Pictograma dirección adelante
SG-SU | Pictogram direction straight



SG-NW | Pictograma blanco
SG-NW | White pictogram